

BIKE BRITE® RETAIL DISPLAY STAND Part Number: MC44DS

Tools Needed: Flat Head Screw Driver, Philips Head Screw Driver, Rubber Mallet

Very Important:

DO NOT FULLY TIGHTEN SCREWS UNTIL COMPLETELY ASSEMBLED

Step 1 Assemble "U" brace to the 2 legs and primary shelf supports. Align with holes and tighten with the screws and wing nuts provided. (Use 2 ½ inch screws and wing nuts and a flat head screw driver)

Step 2 Attach Spreaders using screws provided as shown in the illustration. (Use 1 ½ inch screws and a flat head screw driver)

Step 3 Slip on Secondary Shelf Supports into the Primary Shelf Supports as shown in illustration. (Use locking pins provided on Secondary Shelf Support)


Step 4 Align shelves over pilot holes on Angle Brackets and mount using the pan head wood screws provided. 16 screws provided. (Use Phillips Head Screw Driver)

Step 5 Insert header bracket. (Lightly tap with a rubber mallet to fully set in place)

Step 6 Slide in Bike Brite header into header bracket.

Step 6 Mount plastic display strip one side of secondary shelf support and secure with ½ screw provided. Pilot hole is already provided.

Step 7 Tighten all screws and bolts

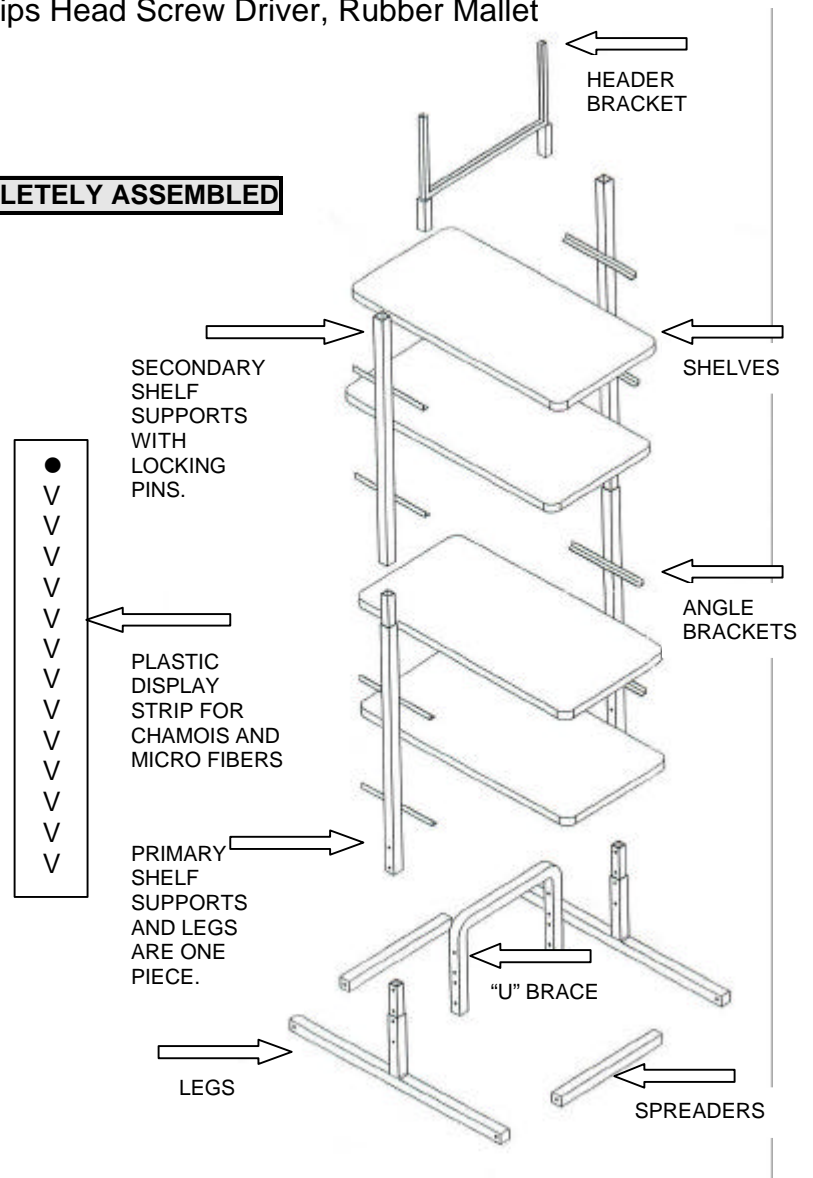

Bike Brite, Inc.

7177 Industrial Park Blvd.

Mentor, OH. 44060

(800) 927-4833

www.bikebrite.com